


METHOD OF ESTABLISHMENT: County: 4-17-02

E: 61902.2450(m)

NOTE: This corner position represents a title corner and may not necessarily be in the position of the Record corner.

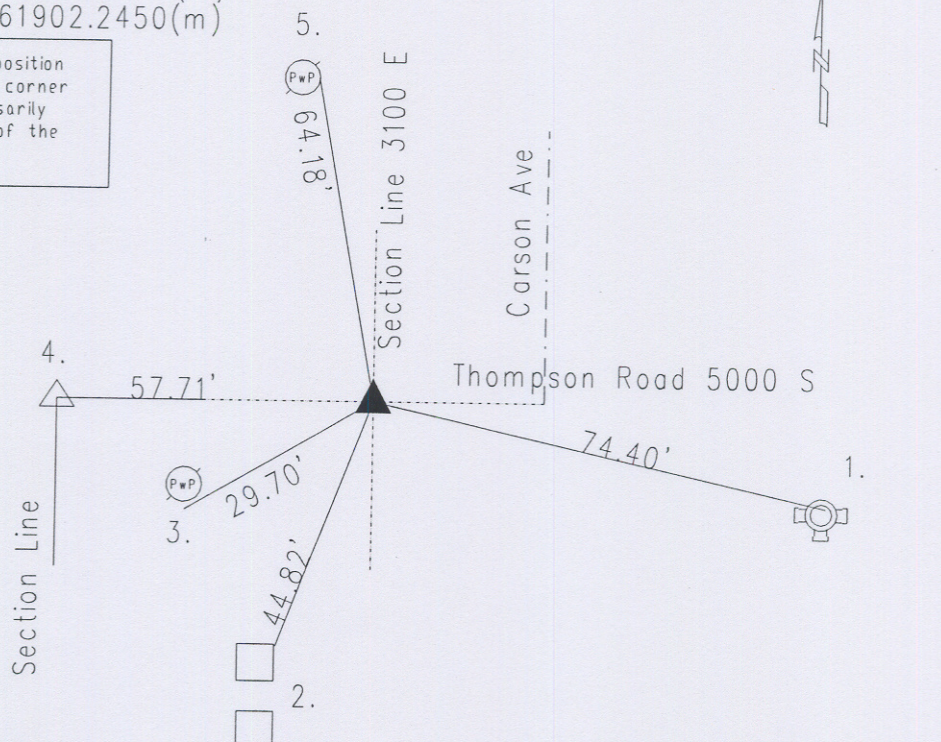

Original post set 1820 by Hendricks with witness: 38" oak N 48 E 17 links; 14" beech s 41 E 8 links per Marion County Atlas pg. 9. Hosbrook 3-19-1850 called corner set on line between E & W w/no witness. Cripe 12-9-70 called PK nail. 6-25-75 MCSO Wilcoxen called railroad spike. 9-20-79 called road nail. 10-20-88 Gries called the same. 8-7-90 excavated and PK nail found at surface. Large road nail found 5" down. No stone found. Harrison set. Re-tied 4-12-96 by Wilcoxen. Re-tied 4-17-02 by Wilcoxen, Re-tied 8-10-07 by Wilcoxen. 15043208

REF.	DISTANCE	DESCRIPTION
1.	74.40'	Top nut of fire hydrant
2.	44.82'	NF corner of brick column sign for Carson Square
3.	29.70'	Mag nail w/bw S PwP#324-700B 6"up
4.	57.71'	Due W to NQ 5-14-4 (Harrison found)
5.	64.18'	Mag nail w/bw F PwP#202-700A 4"up